




Shalam Packaging Ltd.

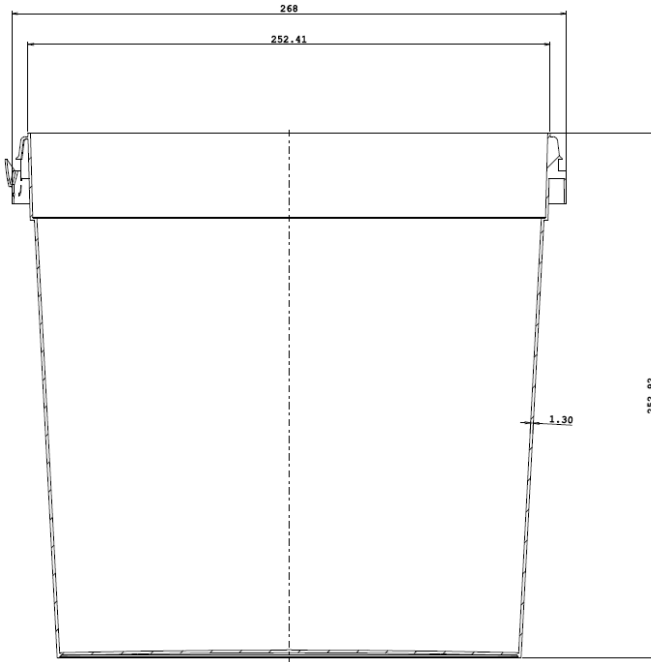

# 10 litre BUCKET 2

Tamper Evident

<b>MATERIAL</b>	Food Grade Polypropylene Co-Polymer, option of recycled content. Polypropylene is a recyclable plastic.		
<b>HANDLE TYPE</b>	Plastic or metal		
<b>COLOUR</b>	White – a range of colours are available on request		
<b>DECORATION</b>	In Mould Labeling available on request		
<b>BRIM VOLUME</b>	10.88 Litres		
<b>WEIGHT</b>	<b>Container:</b> <b>Lid:</b> <b>Metal handle:</b> <b>Plastic handle:</b>	<b>Virgin PP:</b> 290g (+/- 10g) 70g (+/- 4 g) 37g (+/- 2g) 27g (+/- 2 g)	<b>Recycled content PP (min 30%):</b> 319g (+/-24g) 77g (+/-6g)
<b>QUANTITY (EMPTY)</b>	<b>Container:</b> <b>Lid:</b>	360 per pallet (1000mm x 1200mm) 928 per pallet Lids and buckets dairy wrapped for food standards	
<b>STACKING (EMPTY)</b>	<b>Container:</b> <b>Lid:</b>	3 pallets high in pallet box 3 high	
<b>FILLING (Based on product density 1.4 air temperature 20°C)</b>	60 per pallet (15 per layer x 4 high) This is equivalent to a maximum weight of 42kg on the lower bucket. Maximum stacking temperature 40°C. 1150 mm maximum pallet height		
<b>FILL TEMPERATURE</b>	<b>Standard:</b> Max 80°C (avoid prolonged exposure over 40°C and below -20°C) <b>Hot fill:</b> Max 90°C (avoid prolonged exposure over 65°C and below 0°C) <b>Extra hot fill</b> Max 121°C (avoid prolonged exposure over 100°C and below 10°C) Polymer blend can be adjusted to suit other temperatures.		
<b>COMPATIBILITY</b>	It is the responsibility of our customers to ensure their product is compatible with the container. Trials can be carried out by Shalam on request. Stacking performance is affected by temperature, do not stack hot.		

All details correct at the time of printing. Please contact us for additional technical, sales and order assistance.

Shalam Packaging Ltd., Pippis Hill Industrial Estate, Benthalls, Basildon, Essex SS14 3BX

Tel +44 (0)8445 611 566

sales@Shalampackaging.com  
www.Shalampackaging.com

